

# HTP200

General purpose touch panel with glass surface - 10 buttons

HTP200 is a full color glass touch panel with easy to use buttons and RGB backlights.

Supports KNX, RS485 Modbus, Z-wave communication and compatible with UK/EU standard back boxes.




## Product Specification

Product Name	HTP200
Dimensions (H x W x D)	160 x 87 x 9.5 mm
Weight	150 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for <b>HTP200-KNX</b> 24V for <b>HTP200</b>
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for <b>HTP200-KNX</b> 80 mA for <b>HTP200</b>
Power Supply Options	via bus cable
Physical Interfaces	KNX for <b>HTP200-KNX</b> RS485 for <b>HTP200</b>
Communication Protocols	KNX for <b>HTP200-KNX</b> Modbus for <b>HTP200</b>

Temperature Sensor	NTC, 0.5 °C Accuracy
Max Quantity of buttons	10
Status Indicators / Backlight	Individually programmable backlight color and brightness
Mounting	Snap-in magnetic mounting
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20

## Product Dimensions

Top and Side View (mm)

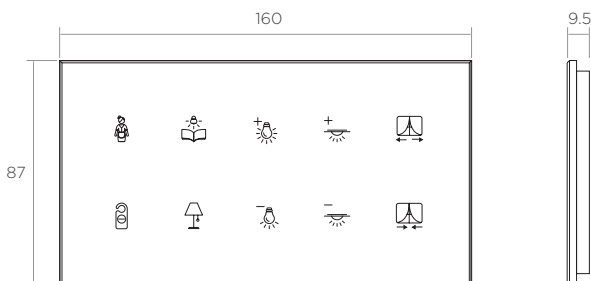

## Required Back Box Types

EU 4M Standard

UK 3x6 Standard

