

# HTP95-3CH-RF

General purpose touch panel with glass surface with card holder - 3 buttons and RFID reader

HTP95-3CH-RF is a full color glass touch panel with easy to use buttons and RGB backlights with RFID key card holder.

Supports KNX, RS485 Modbus, Z-wave communication and compatible with UK standard back boxes.




## Product Specification

Product Name	HTP95-3CH-RF
Dimensions (H x W x D)	95 x 95 x 9.5 mm
Weight	85 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for <b>HTP95-3CH-RF-KNX</b> 24V for <b>HTP95-3CH-RF</b>
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for <b>HTP95-3CH-RF-KNX</b> 50 mA for <b>HTP95-3CH-RF</b>
Power Supply Options	via bus cable
Physical Interfaces	KNX for <b>HTP95-3CH-RF-KNX</b> RS485 for <b>HTP95-3CH-RF</b>
Communication Protocols	KNX for <b>HTP95-3CH-RF-KNX</b> Modbus for <b>HTP95-3CH-RF</b>

RF Frequency	13.56 MHz
Max Quantity of buttons	3
Status Indicators / Backlight	Individually programmable backlight color and brightness
Mounting	Snap-in magnetic mounting
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20

## Product Dimensions

Top and Side View (mm)

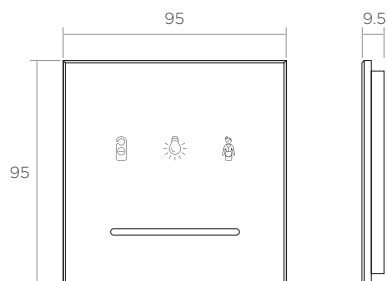

## Required Back Box Types

UK 3x3 Standard

