

HTP95-3D

Glass Touch Door Bell Panel with DND/MUR & Bell

HTP95-3D is glass door panel with DND/MUR and door bell button. Supports KNX or RS485 Modbus communication and compatible with UK/EU standard back box.




Product Specification

Product Name	HTP95-3D
Dimensions (H x W x D)	95 x 95 x 9.5 mm
Weight	85 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for HTP95-3D-KNX 24V for HTP95-3D
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for HTP95-3D-KNX 80 mA for HTP95-3D
Power Supply Options	via bus cable
Physical Interfaces	KNX for HTP95-3D-KNX RS485 for HTP95-3D

Communication Protocols	KNX for HTP95-3D-KNX Modbus for HTP95-3D
Temperature Sensor	NTC, 0.5 °C Accuracy
Status Indicators / Backlight	Individually programmable backlight color and brightness
Mounting	Snap-in magnetic mounting
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20


Product Dimensions

Top and Side View (mm)

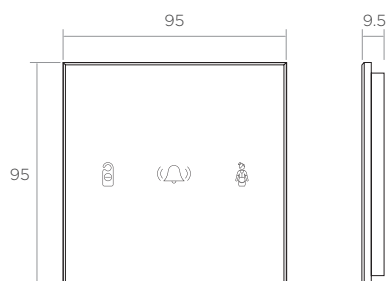

Required Back Box Types

EU 2M Standard

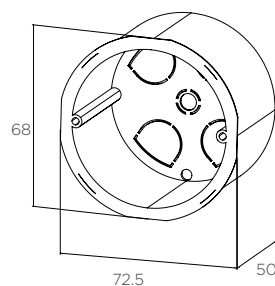

UK 3x3 Standard

