

HDP95-12

General purpose touch panel with glass surface -
Up to 12 buttons

HTP95-12 is a full color glass touch panel with easy to use buttons and RGB backlights.

Supports KNX, RS485 Modbus, Z-wave communication and compatible with UK/EU standard back boxes.




Product Specification

Product Name	HTP95-12
Dimensions (H x W x D)	95 x 95 x 9.5 mm
Weight	85 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for HTP95-12-KNX 24V for HTP95-12
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for HTP95-12-KNX 80 mA for HTP95-12
Power Supply Options	via bus cable
Physical Interfaces	KNX for HTP95-12-KNX RS485 for HTP95-12
Communication Protocols	KNX for HTP95-12-KNX Modbus for HTP95-12

Temperature Sensor	NTC, 0.5 °C Accuracy
Max Quantity of buttons	12
Status Indicators / Backlight	Individually programmable backlight color and brightness
Mounting	Snap-in magnetic mounting
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20

Product Dimensions

Top and Side View (mm)

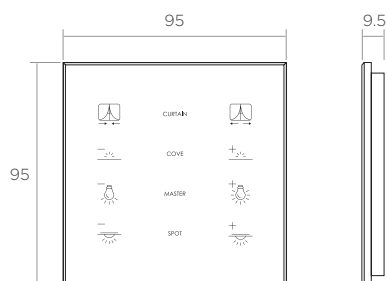

Required Back Box Types

EU 2M Standard

UK 3x3 Standard

